

PHILIPPGROUP

PHILIPP Threaded transport anchor



VB3-T-003-en - 07/18 - PDF

Version: long wavy tail

Installation and Application Instruction

Transport and mounting systems for prefabricated building

■ Technical department

Our staff will be pleased to support your planning phase with suggestions for the installation and use of our transport and mounting systems for precast concrete construction.

■ Special designs

Customized to your particular needs.

■ Practical tests on site

We ensure that our concepts are tailored precisely to your requirements.

■ Inspection reports

For documentation purposes and your safety.

■ On-site service

Our engineers will be pleased to instruct your technicians and production personnel at your plant, to advise on the installation of precast concrete parts and to assist you in the optimisation of your production processes.

■ High safety level when using our products

Close cooperation with federal materials testing institutes (MTIs), and official approvals for the use of our products and solutions whenever necessary.

■ Software solutions


The latest design software, animated videos and CAD libraries can always be found under www.philipp-gruppe.de.

■ Engineering contact

Phone: +49 (0) 6021 / 40 27-318
Fax: +49 (0) 6021 / 40 27-340
E-mail: technik@philipp-gruppe.de

■ Sales contact

Phone: +49 (0) 6021 / 40 27-300
Fax: +49 (0) 6021 / 40 27-340
E-mail: vertrieb@philipp-gruppe.de





Content

- The PHILIPP Threaded transport anchor - long wavy tail
 - System description Page 4
 - EC Declaration of Conformity Page 4
- General notes / anchor selection Page 5
 - Materials Page 5
 - Corrosion protection Page 5
 - Element thicknesses, centre and edge distances Page 5
 - Concrete strength Page 5
 - Selection guide for transport anchors Page 5
- Reinforcement Page 6
 - Minimum reinforcement Page 6
 - Reinforcement instructions for thin elements Page 6
 - Diagonal and lateral tension Page 6
- Permissible load bearing capacities and boundary conditions Page 7
 - for axial tension Page 7
 - for diagonal tension Page 8
 - for lateral tension Page 9



PHILIPP Threaded transport anchor - long wavy tail

PHILIPP Threaded transport anchor - long wavy tail

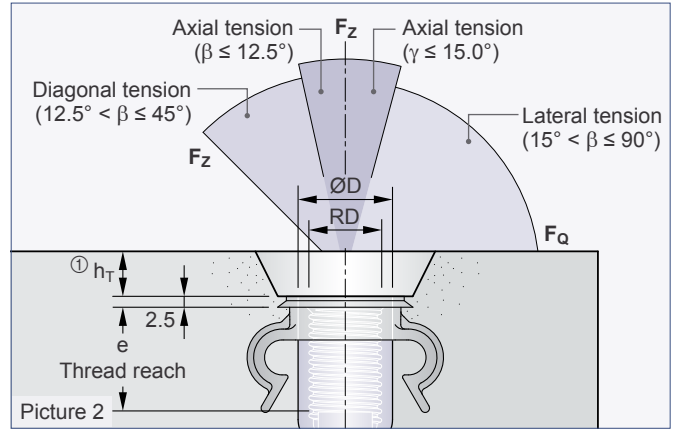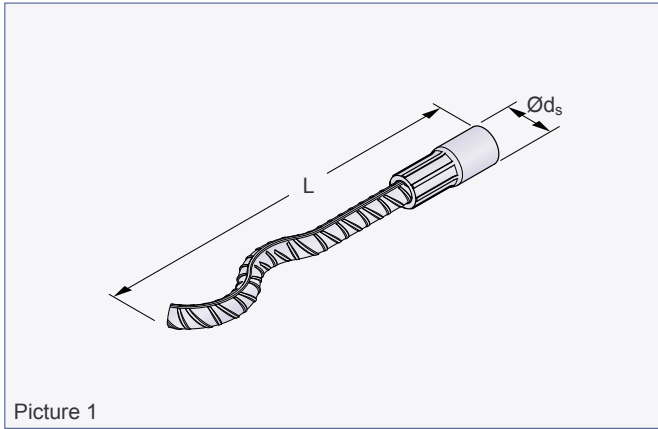

The Threaded transport anchor is part of the PHILIPP Transport anchor system and complies with the VDI/BV-BS-Guideline "Lifting inserts and lifting insert systems for precast concrete elements" (VDI/BV-BS 6205). The use of Threaded transport anchors requires the compliance with this Installation Instruction as well as the General Installation Instruction. The Installation and Application Instructions for the belonging PHILIPP lifting devices (Lifting loop with threaded end, Adapter for lateral tension, "Wirbelstar", "Lifty") as well as the data sheets of the belonging PHILIPP accessories (Plastic nailing plates, Retaining caps KH etc.) must be followed also. The anchor may only be used in combination with the mentioned PHILIPP lifting devices.

Threaded transport anchors are designed for the transport of precast concrete units only. Multiple use within the transport chain (from production to installation of the unit) means no repeated usage. This Installation and Application Instruction does not specify a repeated usage (e.g. ballasts for cranes) or a permanent fixation.



The EC Declaration of Conformity (DoC) of the Threaded transport anchor long wavy tail is available on request or can be downloaded from our website www.philipp-group.de.



Table 1: Dimensions

Ref.-No. ② bright zinc plated	Type	Dimensions					Weight [kg/100 pcs.]	
		RD	ØD [mm]	L [mm]	e [mm]	Ød _s [mm]		
67M12WE	RD 12	12	15.0	137	22	8	7.0	
67M14WE	RD 14	Type RD 14 of the threaded transport anchor system is no longer available					10	14.0
67M16WE	RD 16	16	21.0	216	27	12	24.0	
67M18WE	RD 18	Type RD 18 of the threaded transport anchor system is no longer available					14	35.0
67M20WE	RD 20	20	27.0	257	35	16	49.0	
67M24WE	RD 24	24	31.0	350	43	16	68.0	
67M30WE	RD 30	30	39.5	450	56	20	140.0	
67M36WE	RD 36	36	47.0	570	68	25	250.0	
67M42WE	RD 42	42	54.0	620	75	28	370.0	
67M52WE	RD 52	52	67.0	750	100	32	640.0	

① Mind the embedding depth h_T of the corresponding Nailing plate and Retaining cap (Picture 2).

② Also available in stainless steel (Ref.-No. 75M__VAWE).

General notes / anchor selection

Materials

The Threaded transport anchors consist of a straight reinforcement bar B500B with crimped-on insert. All threaded inserts are made of special high precision steel tubes and are galvanised according to common standards.


This galvanisation protects the anchor temporarily from the storage at the producer site to the final installation in the concrete element.

Corrosion

In order to avoid contamination or damage to the concrete surface of the precast concrete element due to corrosion of the transport anchor (stream of rust or similar), the insert can be delivered in stainless steel alternatively. Here the cut surface of the reinforcement bar is protected by a special sealing against corrosion.

Element thicknesses, centre and edge distances

The installation and position of threaded transport anchors in precast concrete elements require minimum element dimensions and centre/edge distances for a safe load transfer.

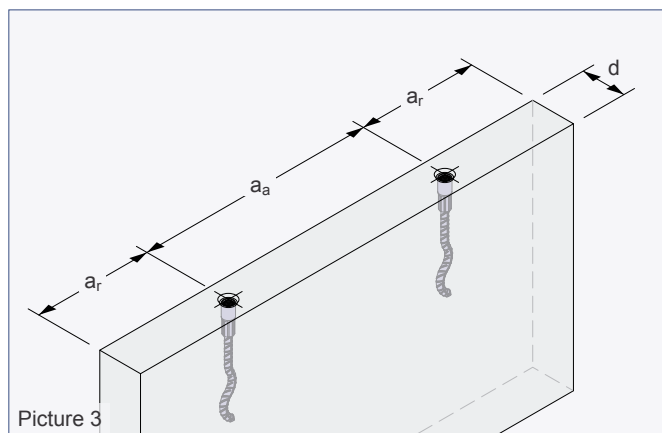

Concrete strength

With the time of the first lift of the concrete unit the concrete strength must have a minimum f_{cc} according to the tables of the respective load case. Given concrete strengths f_{cc} are cube compressive strengths at the time of the first lifting.

Selection guide for transport anchors

Step 1:

Table 2 shows the maximum possible threaded anchor sizes per element thickness as a function of the load case.


Table 2: Element thicknesses and max. anchor sizes for $f_{cc} \geq 15 \text{ N/mm}^2$ / $f_{cc} \geq 20 \text{ N/mm}^2$

Element thickness d [mm]	Transport anchor [Type]			
	Axial tension $\beta_{max} 12.5^\circ$ $\gamma_{max} 15^\circ$	Diagonal tension $\beta_{max} 30^\circ$ $\gamma_{max} 15^\circ$	Diagonal tension $\beta_{max} 45^\circ$ $\gamma_{max} 15^\circ$	Lateral tension $\beta_{max} 45^\circ$ $\gamma_{max} 90^\circ$
60	RD 14	RD 14	RD 14	-
80	RD 16	RD 16	RD 16	RD 16
100	RD 20	RD 20	RD 20	RD 20
120	RD 24	RD 24	RD 24	RD 24
130	RD 36	RD 36		
140	RD 42	RD 42	RD 30	RD 30
150				
200	RD 52	RD 52	RD 36	RD 36
240			RD 42	RD 42
275			RD 52	RD 52

Step 2:

Details of the load bearing capacities and boundary conditions as a function of the concrete compressive strength are given in the following tables.

- Axial tension: **Table 3 / 4** (15 / 20 N/mm²)
- Diagonal tension: **Table 5 / 6** (15 / 20 N/mm²)
- Lateral tension: **Table 7** (15 N/mm²)

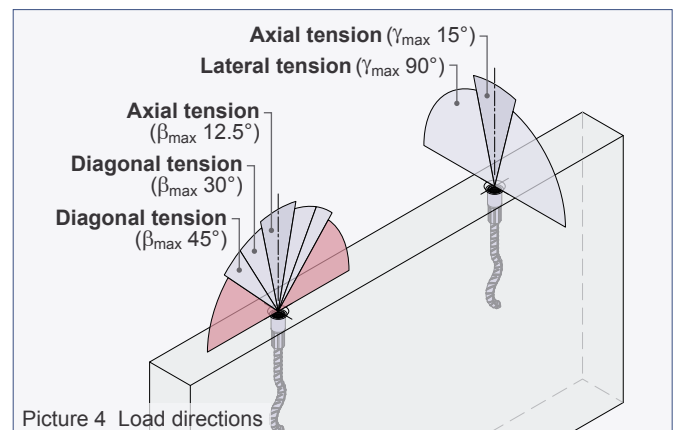

On lateral tension the Threaded transport anchors have only half of the capacity compared to axial loading. However, this is not a limitation as during tilt-up only half of the weight has to be lifted (please refer to the General Installation Instruction).

Reinforcement

Minimum reinforcement


In use of Threaded transport anchors precast units must be reinforced with a minimum reinforcement. Depending on the load case this can differ and is specified in the tables of the respective load case. This minimum reinforcement can be replaced by a comparable steel bar reinforcement. The user is personally responsible for further transmission of load into the concrete unit.


Reinforcement instructions for thin elements

In thin elements it might be necessary to cut the longitudinal reinforcement close to the insert (counter brace) in order to have enough concrete cover in this area. Best position for the longitudinal reinforcement should be below the crimping (see Picture 5).


Add. reinforcement for diagonal and lateral tension

Additional reinforcement for diagonal and lateral tension has to be installed with pressure contact to the anchor insert. The position of the direct pressure contact must be within the thread reach e of the insert (see Picture 6). By using the Marking ring with clip (Ref. No. 74KR__CLIP) this position is guaranteed.

 Existing static or constructive reinforcement can be taken into account for the minimum reinforcement for the respective load case.

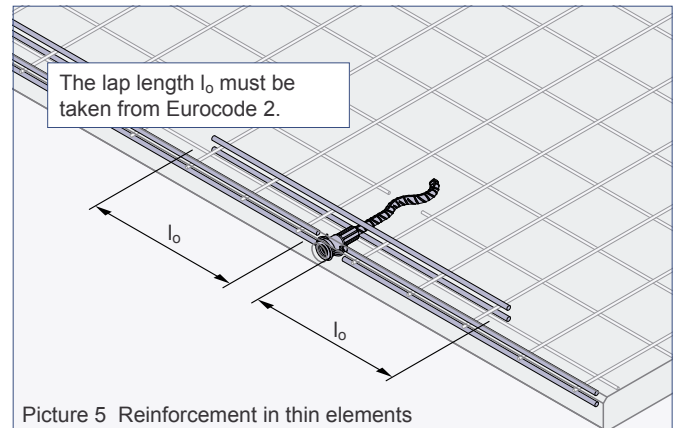


Picture 5 Reinforcement in thin elements

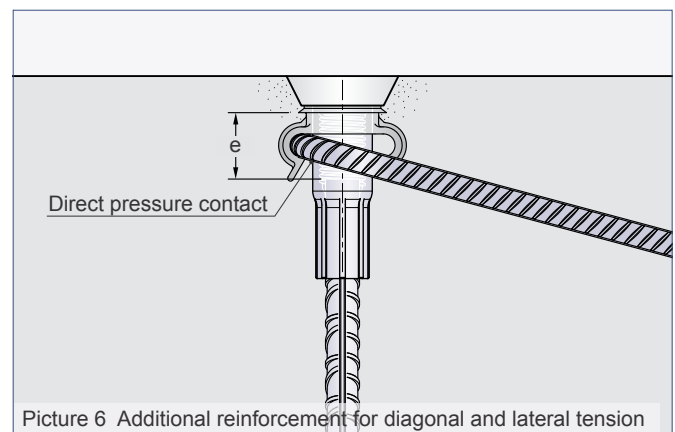

Picture 6 Additional reinforcement for diagonal and lateral tension


Axial tension: Permissible load bearing capacities and boundary conditions

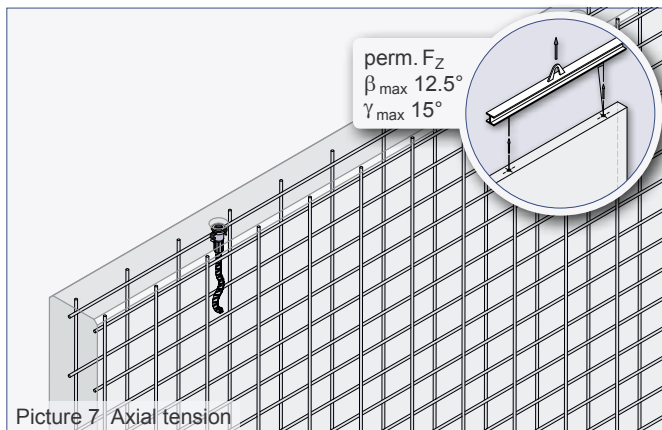


Picture 7 Axial tension

Position of the anchor wave

When installing the threaded transport anchor, the position of the waved end shall be observed. Make sure that this is positioned parallel to the concrete element surface (Picture 8a).

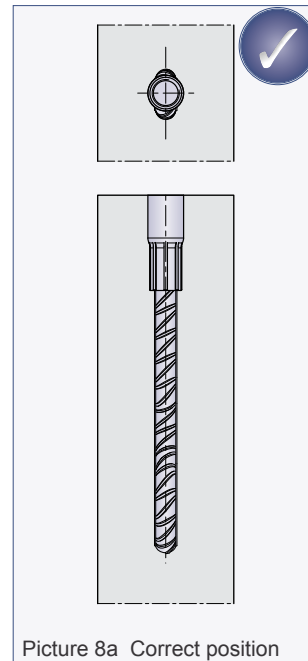

Picture 8a Correct position

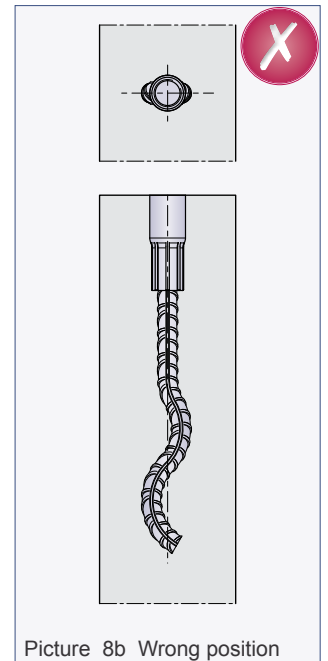

Picture 8b Wrong position

Table 3: Axial tension if $f_{cc} \geq 15 \text{ N/mm}^2$

Load class	Element thicknesses, centre and edge distances			$\beta_{max} 12.5^\circ / \gamma_{max} 15^\circ$	
	d [mm]	a _a [mm]	a _r [mm]	perm. F _Z [kN]	Mesh reinforcement (square) [mm ² /m]
12	60	300	150	5.0	2 × #131
14	60	400	200	8.0	2 × #131
16	80	400	200	12.0	2 × #131
18	100	500	250	16.0	2 × #188
20	100	550	275	20.0	2 × #188
24	120	600	300	25.0	2 × #188
30	140	650	350	40.0	2 × #188
36	200	800	400	63.0	2 × #188
42	240	1000	500	80.0	2 × #188
52	275	1200	600	125.0	2 × #188

Table 4: Axial tension if $f_{cc} \geq 20 \text{ N/mm}^2$

Load class	Element thicknesses, centre and edge distances			$\beta_{max} 12.5^\circ / \gamma_{max} 15^\circ$	
	d [mm]	a _a [mm]	a _r [mm]	perm. F _Z [kN]	Mesh reinforcement (square) [mm ² /m]
36	130	800	400	63.0	2 × #188
42	140	1000	500	80.0	2 × #188
52	150	1200	600	125.0	2 × #188

PHILIPP Threaded transport anchor - long wavy tail

Diagonal tension: Permissible load bearing capacities and boundary conditions

If the Threaded transport anchor is used under diagonal tension $\beta > 12.5^\circ$ an additional reinforcement according to Table 5 or 6 is required. Here the reinforcement for diagonal tension is placed contrarily to the tensile direction (Picture 9) and must have direct pressure contact to the anchor insert in the peak of its bending. The installation of the reinforcement for diagonal tension can be done in an angle of 0° up to 20° to the concrete surface.

With an installation angle of 0° , the transport anchor must be installed in a recessed position (e.g. by using a Nailing plate), as this is the only way to ensure the required concrete cover for the bond.

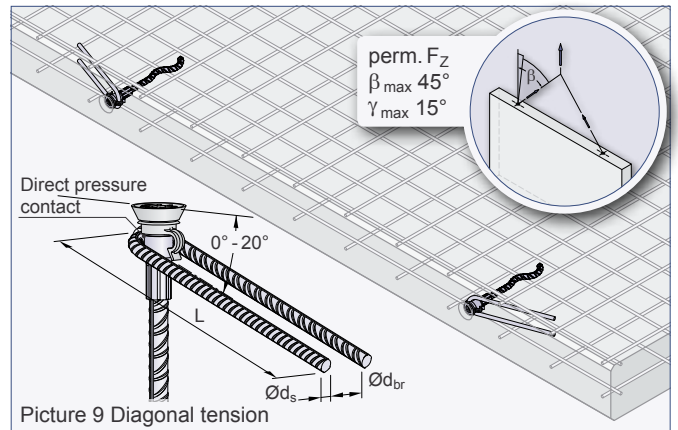


Table 5: Diagonal tension if $f_{cc} \geq 15 \text{ N/mm}^2$

Load class	Element thicknesses, centre and edge distances			perm. F_z [kN]	$\beta_{\max} 30^\circ / \gamma_{\max} 15^\circ$					perm. F_z [kN]	$\beta_{\max} 45^\circ / \gamma_{\max} 15^\circ$				
					Additional reinforcement				Additional reinforcement						
					Mesh reinforcement (square) [mm^2/m]	Ods [mm]	L [mm]	Odbr [mm]	Mesh reinforcement (square) [mm^2/m]		Ods [mm]	L [mm]	Odbr [mm]		
12	60	300	150	5.0	$2 \times \#131$	6	150	24	5.0	$2 \times \#131$	6	150	24		
14	60	400	200	8.0	$2 \times \#131$	6	200	24	8.0	$2 \times \#131$	6	200	24		
16	80	400	200	12.0	$2 \times \#131$	6	250	24	12.0	$2 \times \#131$	8	200	32		
18	100	500	250	16.0	$2 \times \#188$	8	200	32	16.0	$2 \times \#188$	8	250	32		
20	100	550	275	20.0	$2 \times \#188$	8	250	32	20.0	$2 \times \#188$	8	300	32		
24	120	600	300	25.0	$2 \times \#188$	8	300	32	25.0	$2 \times \#188$	10	300	40		
30	140	650	350	40.0	$2 \times \#188$	10	350	40	40.0	$2 \times \#188$	12	400	48		
36	200	800	400	63.0	$2 \times \#188$	12	450	48	63.0	$2 \times \#188$	14	550	56		
42	240	1000	500	80.0	$2 \times \#188$	14	600	56	80.0	$2 \times \#188$	16	600	64		
52	275	1200	600	125.0	$2 \times \#188$	16	700	67	125.0	$2 \times \#188$	20	750	140		

Table 6: Diagonal tension if $f_{cc} \geq 20 \text{ N/mm}^2$


Load class	Element thicknesses, centre and edge distances			perm. F_z [kN]	$\beta_{\max} 30^\circ / \gamma_{\max} 15^\circ$				
					Additional reinforcement				
					Mesh reinforcement (square) [mm^2/m]	Ods [mm]	L [mm]	Odbr [mm]	
36	130	800	400	63.0	$2 \times \#188$	12	450	48	
42	140	1000	500	80.0	$2 \times \#188$	14	600	56	
52	150	1200	600	125.0	$2 \times \#188$	16	700	67	

Lateral tension: Permissible load bearing capacities and boundary conditions


If an Threaded transport anchor is loaded by lateral tension with an inclination of $\gamma > 15^\circ$ an additional reinforcement is required (Table 7). The reinforcement for lateral tension can be done as a single reinforcement bar (Picture 10), double reinforcement bar (Picture 11) or reverse reinforcement bar (Picture 12). There must be direct pressure contact between the insert of the transport anchor and the reinforcement in the peak of the bending. The reinforcement for lateral tension is installed in the front side of the wall contrarily to the load direction. Tilting of walls can cause diagonal and lateral tension at the same time (Picture 11 and 12).

In this case only the reinforcement for lateral tension is required (reverse reinforcement or double reinforcement bar). The diagonal tension is already covered by using this reinforcement. During mounting the tilt-up or turn-over of a unit requires lateral reinforcement (single reinforcement bar according to Picture 10 or reverse reinforcement bar for lateral tension according to Picture 12). The double reinforcement bar for lateral tension (Picture 11) covers standard lifting directions.


With lateral tension the mesh reinforcement according to table 7 must be applied as a mesh cap. This mesh cap can be replaced by a comparable steel bar reinforcement. In addition to the mesh cap longitudinal reinforcement must be installed as shown in Table 7.

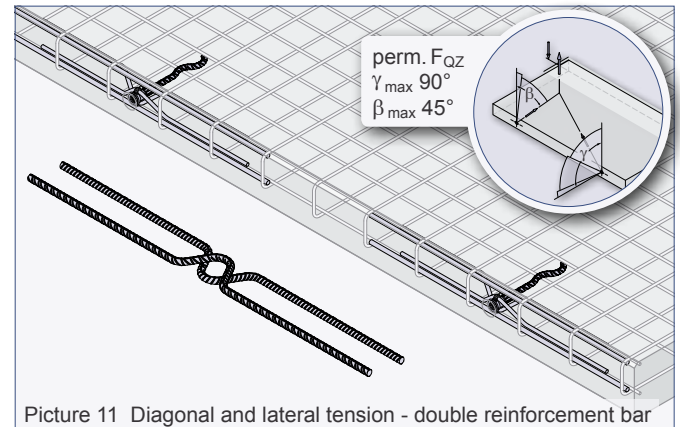

Picture 11 Diagonal and lateral tension - double reinforcement bar

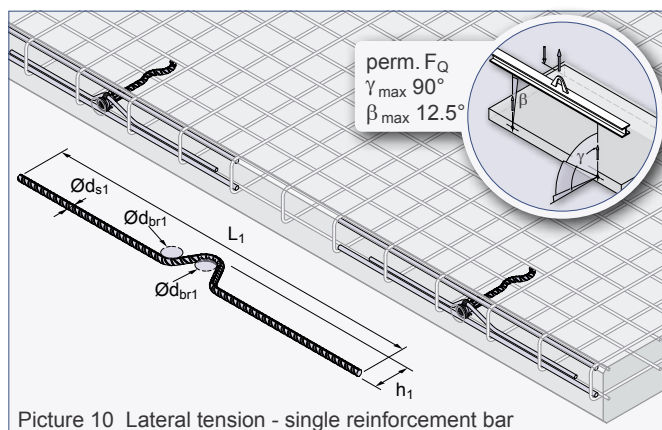

Picture 10 Lateral tension - single reinforcement bar

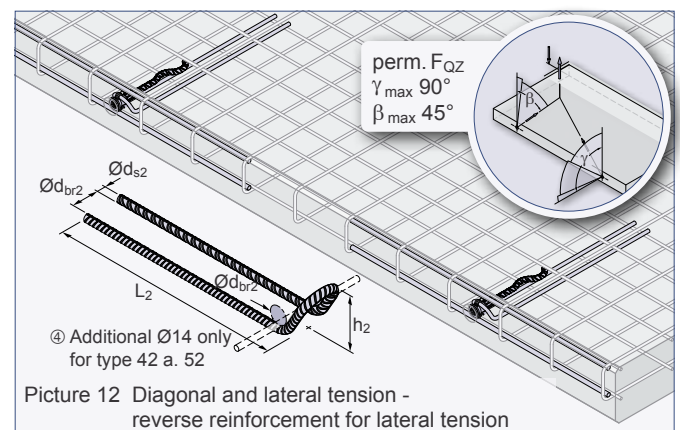

Picture 12 Diagonal and lateral tension - reverse reinforcement for lateral tension

Table 7: Diagonal tension if $f_{cc} \geq 15 \text{ N/mm}^2$

Load class	Element thicknesses, centre and edge distances			perm. F_{QZ} [kN]	Mesh reinforcement (square) ^③ [mm ² /m]	$\gamma_{max} 90^\circ / \beta_{max} 45^\circ$ ^⑥											
						Additional reinforcement										Longitudinal reinforcement	
						Add. reinforcement for lateral tension					Reverse reinforcement						
d [mm]	a_a [mm]	a_r [mm]				Single reinforcement bar	Reverse reinforcement					\emptyset [mm]	Length [mm]				
						$\emptyset d_{s1}$ [mm]	L_1 [mm]	h_1 [mm]	$\emptyset d_{br1}$ [mm]	$\emptyset d_{s2}$ [mm]	L_2 [mm]	h_2 [mm]	$\emptyset d_{br2}$ [mm]				
12	80	300	150	2.5	$2 \times \#131$	6	500	49	24	6	270	35	24	10	850		
14	80	400	200	4.0	$2 \times \#131$	6	700	49	24	6	350	42	24	10	850		
16	80	400	200	6.0	$2 \times \#131$	8	600	49	32	8	420	49	32	10	850		
18	100	500	250	8.0	$2 \times \#188$	8	750	55	32	8	460	55	32	12	850		
20	100	550	275	10.0	$2 \times \#188$	10	800	64	40	10	490	64	40	12	850		
24	120	600	300	12.5	$2 \times \#188$	12	800	75	48	12	520	75	48	12	850		
30	140	650	350	20.0	$2 \times \#188$	12	1000	92	48	12	570	92	48	16	1000		
36	200	800	400	31.5	$2 \times \#188$	14	1000	118	56	14	690	118	56	16	1000		
42	240	1000	500	40.0	$2 \times \#188$	16	1200	143	64	16 ^④	830	143	64	16	1000		
52	275	1200	600	62.5	$2 \times \#188$	20	1500	174	140	20 ^④	930	174	140	20	1200		

③ The mesh reinforcement shall be done as a mesh cap or by using similar rebars.
 ④ Additional $\emptyset 14$, length = 600 mm required (see Picture 12)
 ⑥ For the reinforcement "single reinforcement bar" (picture 10) only F_Q ($\beta_{max} 12.5^\circ$) is permissible!

Our customers trust us to deliver. We do everything in our power to reward their faith and we start each day intending to do better than the last. We provide strength and stability in an ever-changing world.

Welcome to the PHILIPP Group

Sustainable
solutions

PHILIPPGROUP



PHILIPP GmbH

Lilienthalstrasse 7-9
D-63741 Aschaffenburg
Phone: + 49 (0) 6021 / 40 27-0
Fax: + 49 (0) 6021 / 40 27-440
info@philipp-group.de

PHILIPP GmbH

Roßlauer Strasse 70
D-06869 Coswig/Anhalt
Phone: + 49 (0) 34903 / 6 94-0
Fax: + 49 (0) 34903 / 6 94-20
info@philipp-group.de

PHILIPP GmbH

Sperberweg 37
D-41468 Neuss
Phone: + 49 (0) 2131 / 3 59 18-0
Fax: + 49 (0) 2131 / 3 59 18-10
info@philipp-group.de

PHILIPP ACON Hydraulic GmbH

Hinter dem grünen Jäger 3
D-38836 Dardesheim
Phone: + 49 (0) 39422 / 95 68-0
Fax: + 49 (0) 39422 / 95 68-29
info@philipp-group.de



PHILIPP Vertriebs GmbH

Leogangerstraße 21
A-5760 Saalfelden / Salzburg
Phone + 43 (0) 6582 / 7 04 01
Fax + 43 (0) 6582 / 7 04 01 20
info@philipp-gruppe.at

For more information visit our website: www.philipp-group.de