

PHILIPP GROUP

PHILIPP Accessories



for the Spherical head transport anchor system


Data sheet

Rubber recess former

In order to couple the Spherical head lifting clutch easily and safely the Spherical head anchor must be installed with the corresponding recess former. These recess formers can be supplied in a rubber, steel or magnetic version.

Table 1: Dimensions Rubber recess former (with steel parts)


Ref.-No.	Type	D _a	h	Colours		Weight [kg/100 pcs.]
		[mm]	[mm]			
83-AKK-013	KK 1.3	60	30		blue	10.0
83-AKK-025	KK 2.5	74	37		yellow	20.0
83-AKK-050	KK 4.0 / 5.0	94	47		blue	40.0
83-AKK-075	KK 7.5	118	59		red	70.0
83-AKK-100	KK 10.0	118	59		yellow	70.0
83-AKK-150	KK 15.0	160	80		grey	136.0
83-AKK-200	KK 20.0	160	80		grey	136.0
83-AKK-320	KK 32.0	214	107		black	360.0

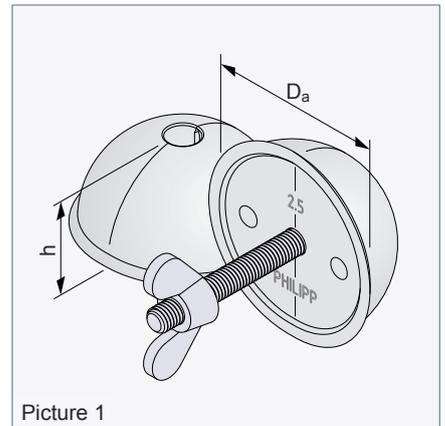

Picture 1

Table 2: Dimensions Rubber recess former (without steel parts)

Ref.-No.	Type	D _a	h	Colours		Weight [kg/100 pcs.]
		[mm]	[mm]			
83-AKO-013	KK 1.3	60	30		blue	6.0
83-AKO-025	KK 2.5	74	37		yellow	11.0
83-AKO-050	KK 4.0 / 5.0	94	47		blue	21.0
83-AKO-075	KK 7.5	118	59		red	42.0
83-AKO-100	KK 10.0	118	59		yellow	42.0
83-AKO-150	KK 15.0	160	80		grey	109.0
83-AKO-200	KK 20.0	160	80		grey	109.0
83-AKO-320	KK 32.0	214	107		black	340.0

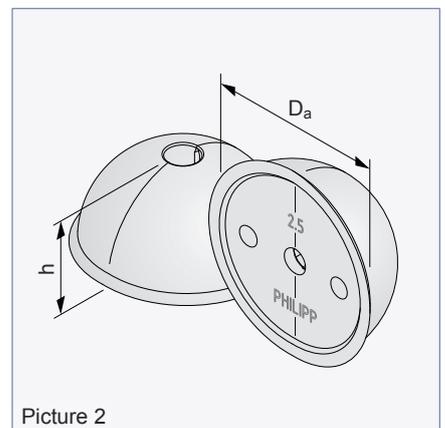

Picture 2

Steel recess former

Table 3: Dimensions Steel recess former

Ref.-No.	Type	D_a	M	h	Weight [kg/100 pcs.]
		[mm]	[mm]	[mm]	
83-AKS-013	KK 1.3	60	8	28	39.0
83-AKS-025	KK 2.5	74	12	33	69.0
83-AKS-050	KK 4.0/5.0	94	12	42	140.0
83-AKS-100	KK 7.5/10.0	118	12	42	276.0

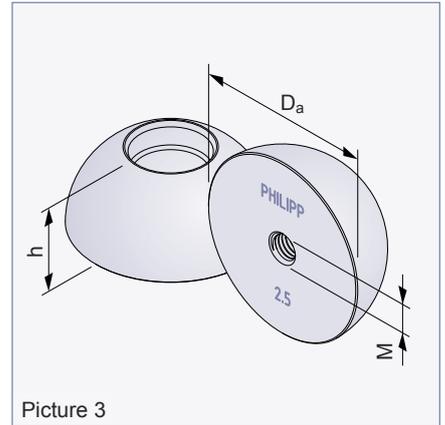


Table 4: Dimensions Magnetic recess former

Ref.-No.	Type	D_a	M	h	Adhasion	Weight [kg/100 pcs.]
		[mm]	[mm]	[mm]	[kg]	
83-AKM-013	KK 1.3	58	8	27	170	40.0
83-AKM-025	KK 2.5	74	12	33	265	64.0
83-AKM-050	KK 4.0/5.0	94	12	42	470	132.0
83-AKM-100	KK 7.5/10.0	118	12	53	600	269.0


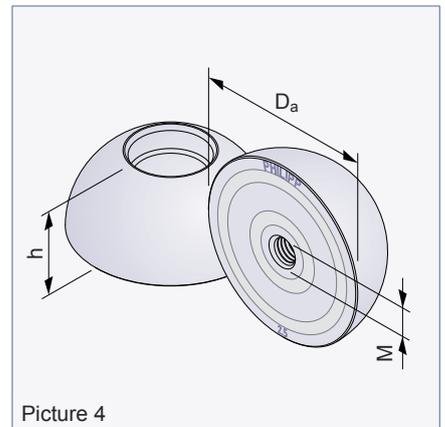


Table 5: Dimensions Steel recess former, to be opened

Ref.-No.	Type	D_a	M	h	Weight [kg/100 pcs.]
		[mm]	[mm]	[mm]	
83-AKA-013	KK 1.3	60	10	28	36.0
83-AKA-025	KK 2.5	74	10	33	67.0
83-AKA-050	KK 5.0	94	10	46	140.0
83-AKA-100	KK 10.0	118	12	58	285.0

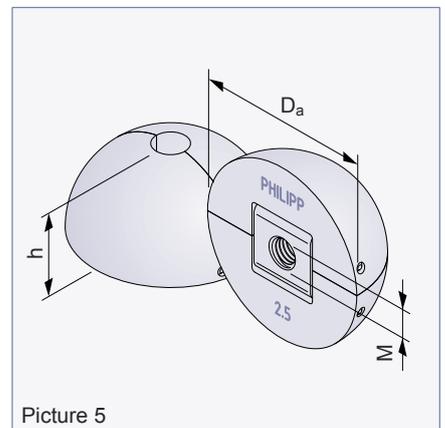

Accessories

Table 6: Rubber ring for steel recess formers

Ref.-No.	Type	Weight [kg/100 pcs.]
83-GMS-013	KK 1.3	0.40
83-GMS-025	KK 2.5	0.90
83-GMS-050	KK 4.0/5.0	1.40
83-GMS-100	KK 10.0	2.20

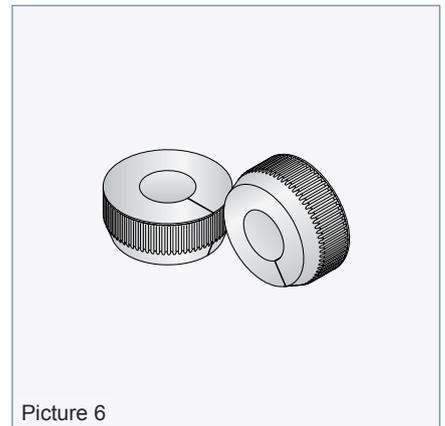


Table 7: Stamped part with internal thread

Ref.-No.	Type	M [mm]	S [mm]	Weight [kg/100 pcs.]
83-SIG-013	KK 1.3	8	9.0	1.0
83-SIG-025	KK 2.5	10	11.0	1.8
83-SIG-050	KK 4.0/5.0	10	12.5	2.6
83-SIG-075	KK 7.5	12	15.0	3.9
83-SIG-100	KK 10.0	12	15.0	3.9
83-SIG-200	KK 15.0/20.0	12	15.0	6.3

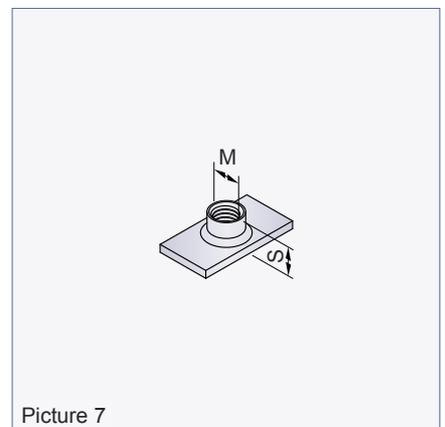


Table 8: Stamped part with threaded rod

Ref.-No.	Type	M [mm]	L [mm]	Weight [kg/100 pcs.]
83-SGS-013	KK 1.3	8	80	4.0
83-SGS-025	KK 2.5	10	80	9.0
83-SGS-050	KK 4.0/5.0	10	80	10.0
83-SGS-075	KK 7.5	12	100	17.0
83-SGS-100	KK 10.0	12	100	17.0
83-SGS-200	KK 15.0/20.0	12	100	23.0

